


Hot Stamping Machine

Navitas

V - 2

*UP-DOWN type
Hot stamping
Machine*

- ◆ Possible for changing program and developing inline easily
by adopting commercially available sequencer.
- ◆ Possible for setting the zone of temperature for processing
- ◆ Prevent the occurrence of defective by sounding the alarm and stopping
the machine in case of exceeding the range of heater plate temperature
- ◆ Easy foil setting
----- one touch operation without any tools, cantilever type foil feeding unit
- ◆ No trouble of by unremoving drain by adopting auto drain system

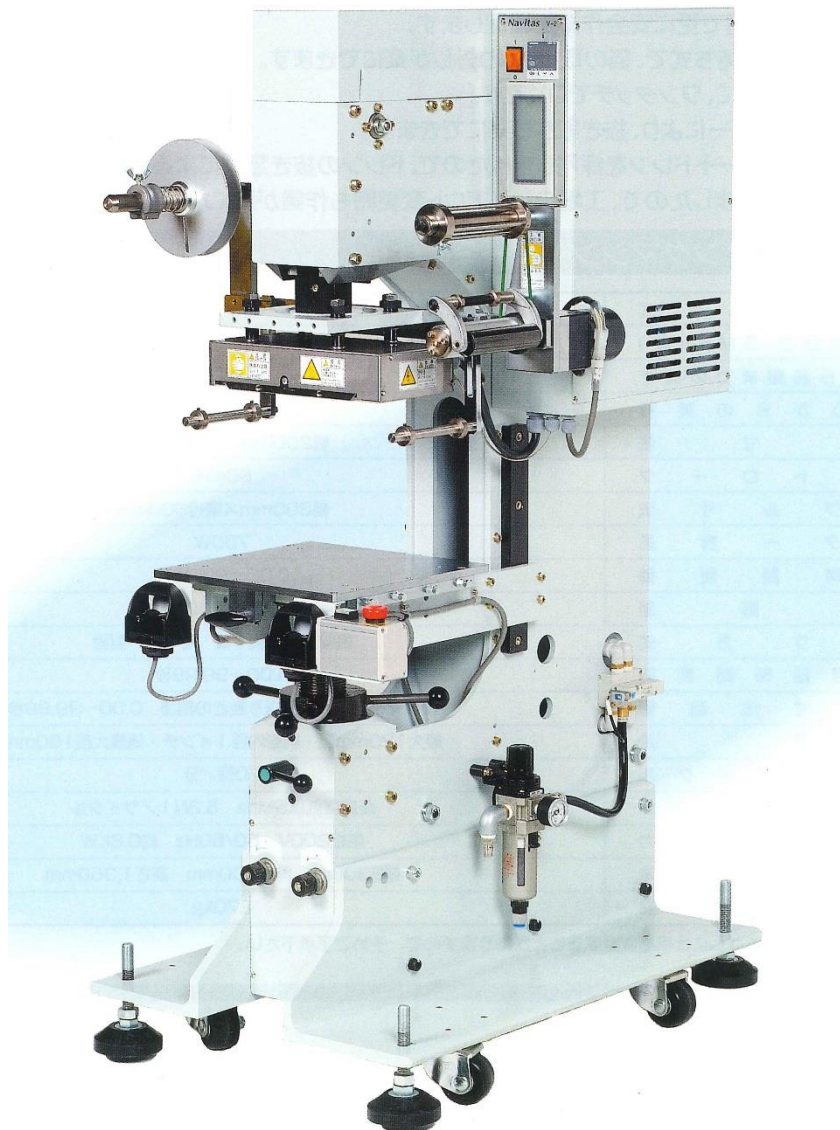

SPECIFICATION

1. Stamping unit	
① Stamping system	Pneumatic single toggle type
② Stamping pressure	19.6 kN (2,000kgf)
③ Depth from the hot plate center	250 mm
④ Stamping time control	0.00 ~ 99.9 sec
⑤ Table dimension	(W) 300 mm (D) 300 mm
2. Hot plate unit	
⑦ Hot plate dimension	(W) 200 mm (D) 120 mm
⑧ Hot plate stroke	60 mm
⑨ Heater	700 W
⑩ Temperature control	Room temperature ~ 260°C
⑪ Distance from table to the hot plate	0 ~ 200 mm
3. Foil feeder unit	
⑫ Foil feed system	Inverter motor – driven,
⑩ Foil feed speed	0 ~ 200 mm / sec (variable)
⑪ Foil feed rate control	Feed length adjustment by timer control to 0.00 ~ 99.99 sec
⑫ Foil feed delay time control	0.00 ~ 99.99 sec
⑬ Max. foil width	120 mm
4. Power supply	
	single-phase 200V 50/60Hz 0.8 kW
5. Air source (@0.5MPa air pressure)	
	5.3 NI / cycle
6. Machine dimensions	
	(W) 630mm (D) 800mm (H) 1,360mm
7. Weight	
	approx. 270 kg



ナビタス株式会社のみ認証取得



NAVITAS CO.,LTD.

9-1 ISHIZUKITAMACHI, SAKAI-KU, SAKAI,
OSAKA 590-0823 JAPAN
Tel : +81-72-243-1122 / Fax : +81-72-245-2555
Web : <http://www.navitas.co.jp/>